

STACKABLE VALVES FLOW CONTROL

AM5-FX-*

100 l/min 32 MPa (320 bar)

1 DESCRIPTION

Stackable valve CETOP 5 with meter in control (referred to the hydraulic actuator). It is possible to control the lines A, B or AB simply turning the side screws.

On demand it is possible to have also the fine control option.



2 ORDERING CODE

(1)	(2)	(3)	(4)	(5)	(6)
AM5	-	FX	-	-	/ 10

(1) AM5 : stackable valve CETOP 05 - Pressure 32 MPa (320 bar)

(2) FC : one-way flow control valves with meter-out control (referred to the hydraulic actuator)

(3) Service lines where the controls operates:

AB : controls on A and B. Fluid flows unrestricted A->A1 and B->B1; flow is controlled from A1->A and B1->B.


A : flow is controlled from A1->A; free on B.

B : flow is controlled from B1->B; free on A.


(4) flow control characteristics for A1->A and B1->B (see also [6]) and check valve opening pressure (Pm) for flow A->A1 and B->B1
no designation : standard control and Pm approx 0.04 MPa (0.4 bar)
V : fine control
4 : Pm approx 0.4 MPa (4 bar)

(5) Code reserved for special variants

(6) Design number (progressive) of the valve

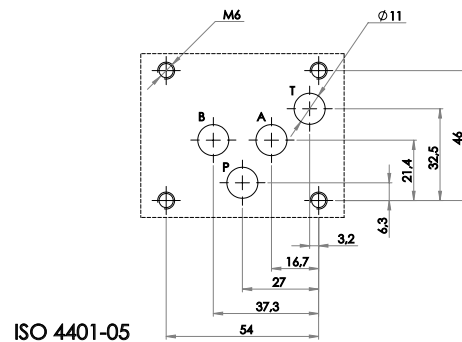


AM5 - FX - AB

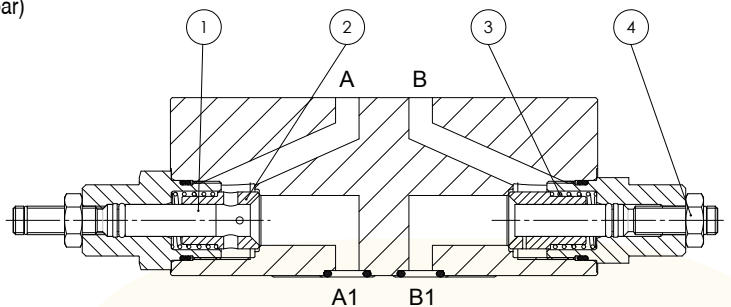


Fluid flows freely on P and T lines; on service lines A and/or B with controls, fluid flow from A1->A (and/or B1->B) overcoming the force of spring acting on sleeve; fluid flows from A->A1 (and/or B->B1) through orifices of sleeve which is pushed against its seat; the throttling axis, which is shifted by screwing it and locked by its nut, partially obstructs the control orifices, thus making the flow rate entirely dependent upon the available pressure drop.


AM5-FX-AB




AM5-FX-A



AM5-FX-B



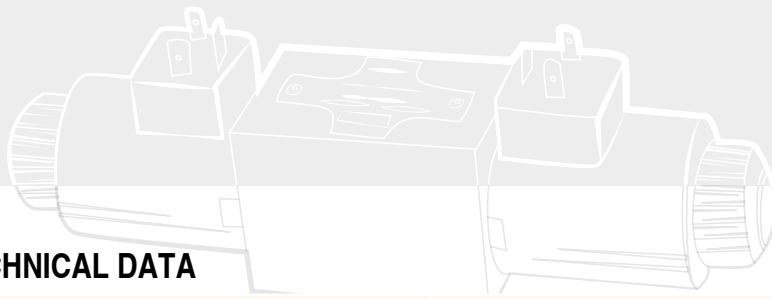


3 TECHNICAL DATA

Maximum rec. flow rate	100 l/min	Control of the flow: The control is made by throttling from A1->A (and/or B1->B), through variable orifices. Depending on the various sleeve/axis combination, the control adjustment is: - (standard) : orifices area is reduced from 100% (*) to 0% with 6 complete turns of the adjustment screw. -V (fine): from 100% (**) to 0% with 5 complete turns of the adjustment screw. (*) 100% approx: Q=60l/min at $\Delta p=20$ bar (**) 100% approx: Q=30l/min at $\Delta p=20$ bar The axis is shifted to increase throttling by unlocking its nut and turning clock wise the adjustment screw. Suitable mechanical stops prevent dangerous manoeuvring.
Maximum nominal pressure	32 MPa (320 bar)	
Pressure drops	see 4	
Installation and dimensions	see 6	
mass	approx 3 kg	

4 TYPICAL DIAGRAMS


Typical Δp -Q curves for valves AM5-FX-AB in standard configuration, with mineral oil at 36 cSt and at 50°C with throttling axis at full retraction.

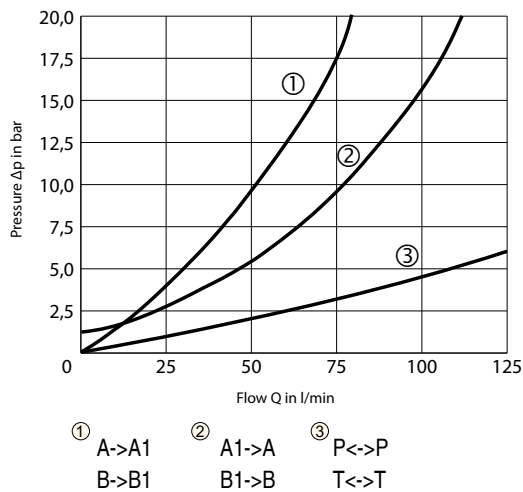

5 HYDRAULIC FLUIDS

Seals and materials used on standard valves AM5-* are fully compatible with hydraulic fluids of mineral oil base, upgraded with antifoaming and antioxidantizing agents. The hydraulic fluid must be kept clean and filtered to ISO 4406 class 19/17/14, or better, and used in a recommended viscosity range from 10 cSt to 60 cSt.

6 INSTALLATION DIMENSIONS

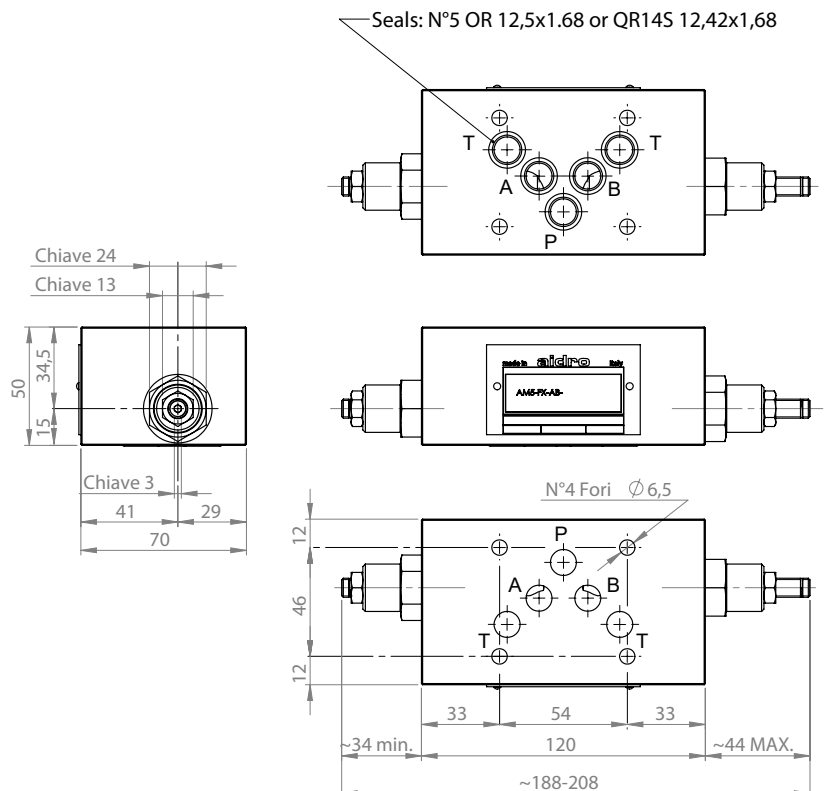

All stackable valves AM5-FX-* conform with ISO and CETOP specifications for mounting surface dimensions. Valves height 50 mm. Leakage between valve and mounting surface is prevented by the positive compression on their seats of 4 seals of OR type or Quading type.